

2022

600 X 600 mm
Porcelain tiles

LT-DK MATT SERIES





VCERA

TILES LLP



4002-LT



4002-DK

600 X 600 mm
Porcelain tiles





4014-DK



4014-LT

600 X 600 mm
Porcelain tiles





VCERA

TILES LLP



4018-DK



4018-LT

600 X 600 mm
Porcelain tiles






4019-DK



4019-LT

600 X 600 mm
Porcelain tiles

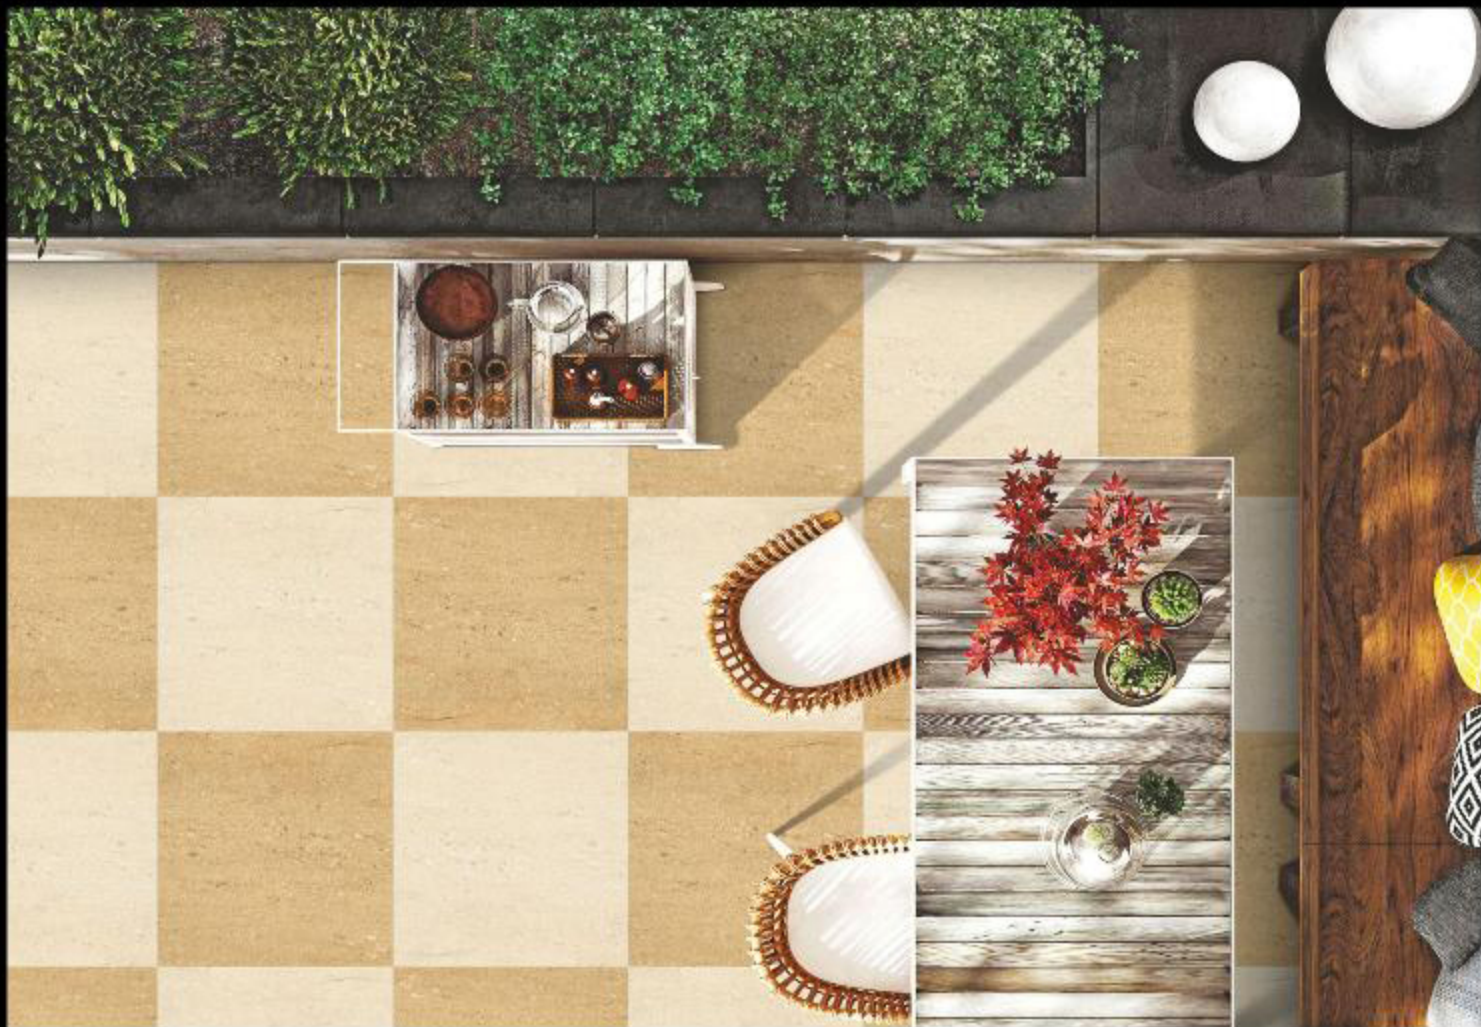



VCERA

TILES LLP



4021-DK



4021-LT

600 X 600 mm
Porcelain tiles





4025-DK



4025-LT

600 X 600 mm
Porcelain tiles





4026

600 X 600 mm
Porcelain tiles





4027

600 X 600 mm
Porcelain tiles





VCERA


TILES LLP



4030




600 X 600 mm
Porcelain tiles

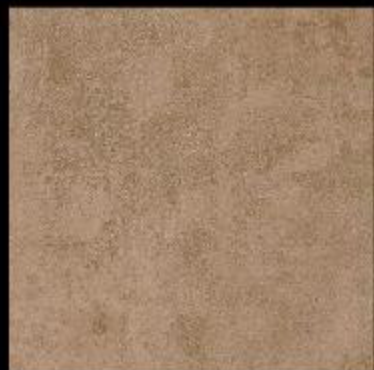

4033

600 X 600 mm
Porcelain tiles



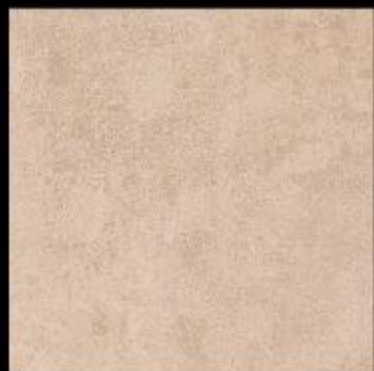

4034

600 X 600 mm
Porcelain tiles






4035

600 X 600 mm
Porcelain tiles



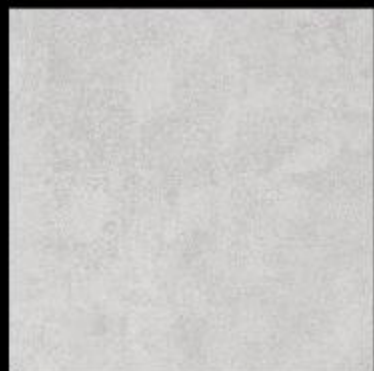


4036

600 X 600 mm
Porcelain tiles





4037

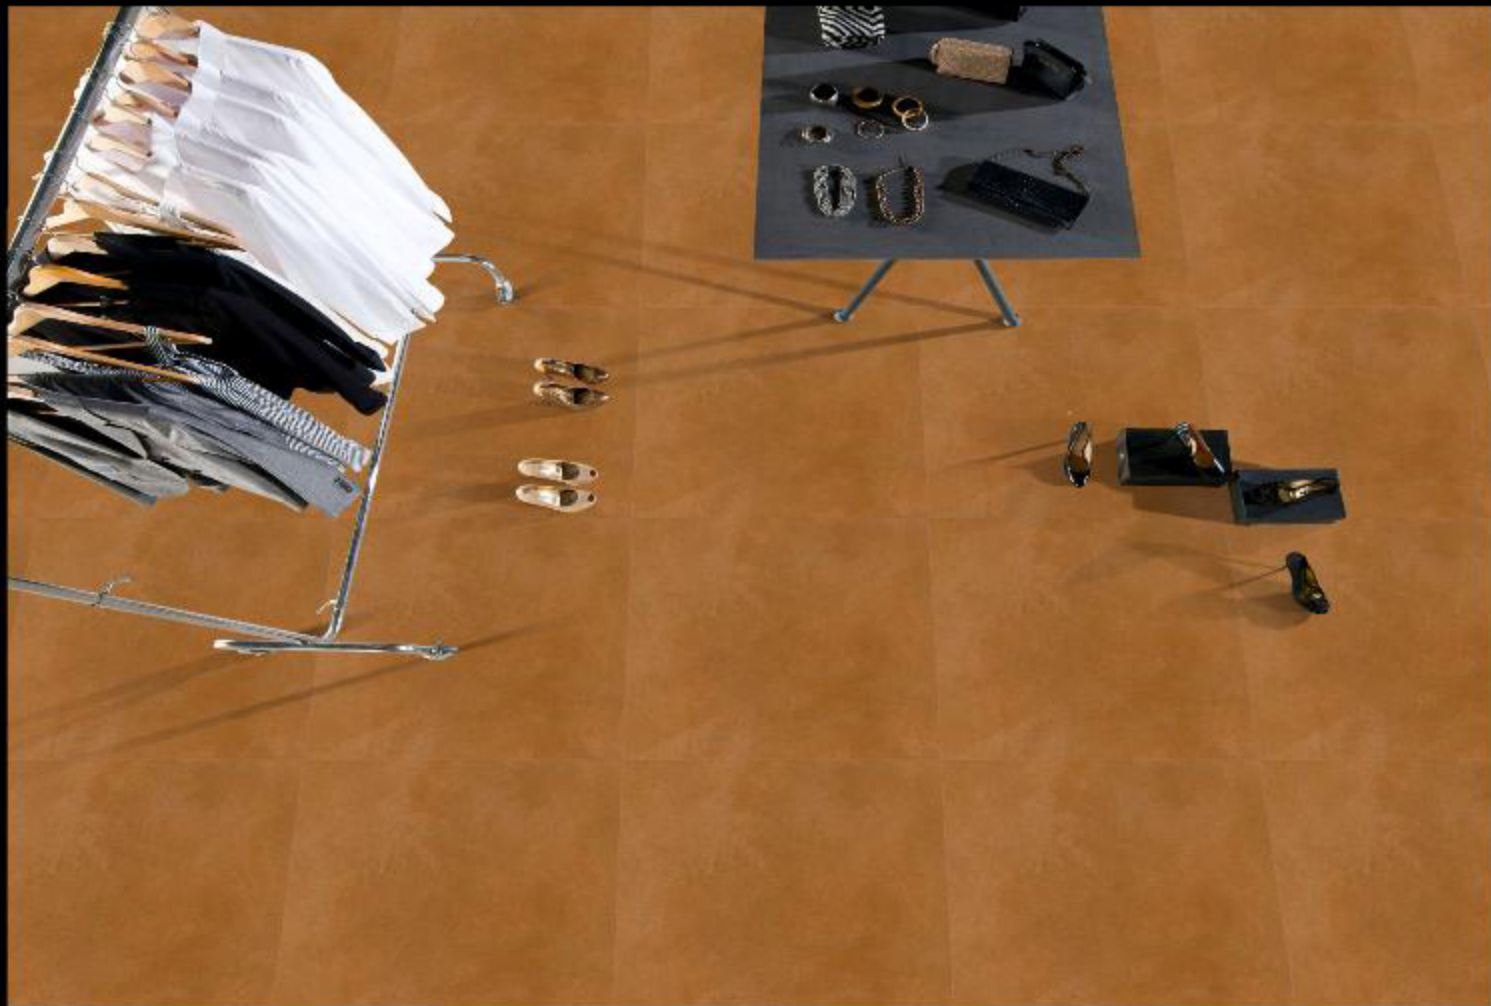

600 X 600 mm
Porcelain tiles



4041

600 X 600 mm
Porcelain tiles






4042

600 X 600 mm
Porcelain tiles



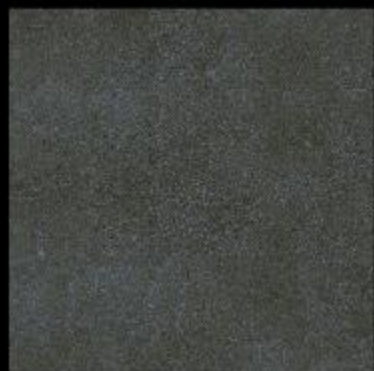

4043



600 X 600 mm
Porcelain tiles



4045

600 X 600 mm
Porcelain tiles





4046

600 X 600 mm
Porcelain tiles





4047

600 X 600 mm
Porcelain tiles



Particulars	Standard as per ISO 13006/EN 178	OUR VALUE	METHOD OF TESTING
Deviation in length	± 0.50%	± 0.3%	EN 98
Deviation in Thickness	+ 5%	+3%	EN 98
Streightness Of Sides	± 0.5%	± 0.3%	EN 98
Rectangularity	± 0.6%	± 0.3%	EN 98
Surface Flatness	+ 0.5%	+ 0.3%	EN 98
Water Absorption	< 3	3 < 4	ISO 10945.3 EN 98
Mohs Hardness	> 5	> 5	EN 101
Flexural Strength	> 35 N/Sq.mm	> 39 N/Sq.mm	—
Abrasion Resistance	As specified by Manufacturer	PE 3	ISO 10545.6 EN 102
Frost Resistance	Frost Proof	Frost Proof	ISO 10534 - 11
Chemical Resistance	No Damage	No Damage	ISO 10534 - 18
Thermal Shock Resistance	No Damage	No Damage	ISO 10545- 9
Colour Resistance	No Damage	No Damage	—
Stain Resistance	Resistance	Stain Proof	ISO 10545 - 14
Moisture Expansion	Nil	Nil	ISO 10545 - 10
Crazing Resistance	Min 2 Cycle	Min 4 Cycle	—

Note: Color shown on any sample as the indication of the printing process and color. This color is not guaranteed to be the same as the color of the tiles in use. Color differences may occur due to the nature of the printing process. However, the company shall use the best of its efforts to ensure that the color of the tiles is as close as possible to the color of the sample. It is suggested to check the color of the tiles before purchase and apply the company color tolerance report to the tiles.

PACKING DETAIL

Size	Thickness	No.OF Tiles	Area Approx.	Weight Approx.
600x600 mm	9 mm	4 Pcs.	1.44 Sq. Mtr.	28 kg.

UTILITY OF FLOOR TILES

