


2022

600 X 600 mm
Porcelain tiles

DOUBLE CHARGE MATT SERIES



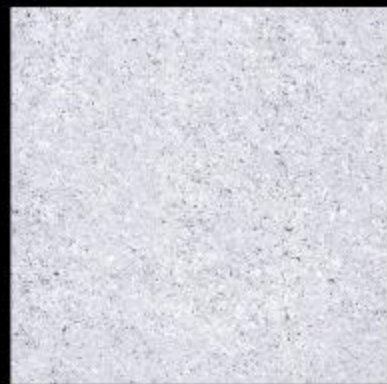

3001



600 X 600 mm
Porcelain tiles



3002



600 X 600 mm
Porcelain tiles



3003



600 X 600 mm
Porcelain tiles



3004



600 X 600 mm
Porcelain tiles



3008

600 X 600 mm
Porcelain tiles



3012



600 X 600 mm
Porcelain tiles




3016



3015

600 X 600 mm
Porcelain tiles

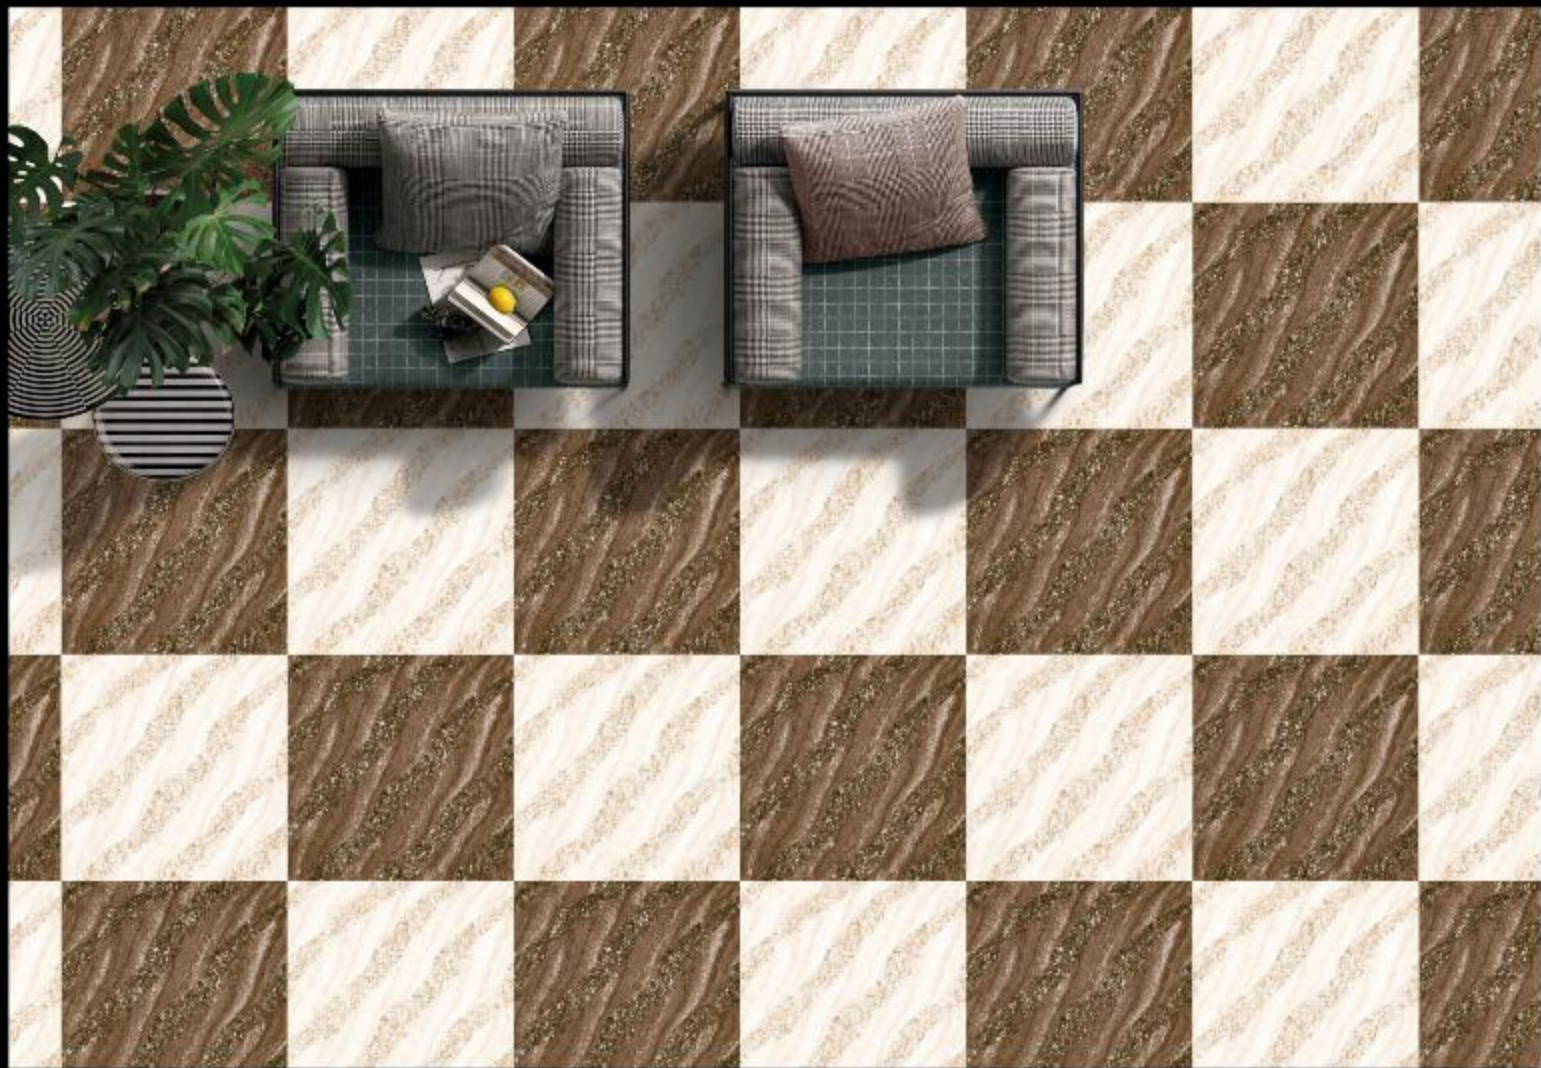



3017



600 X 600 mm
Porcelain tiles



3018

600 X 600 mm
Porcelain tiles






3021

600 X 600 mm
Porcelain tiles



3029

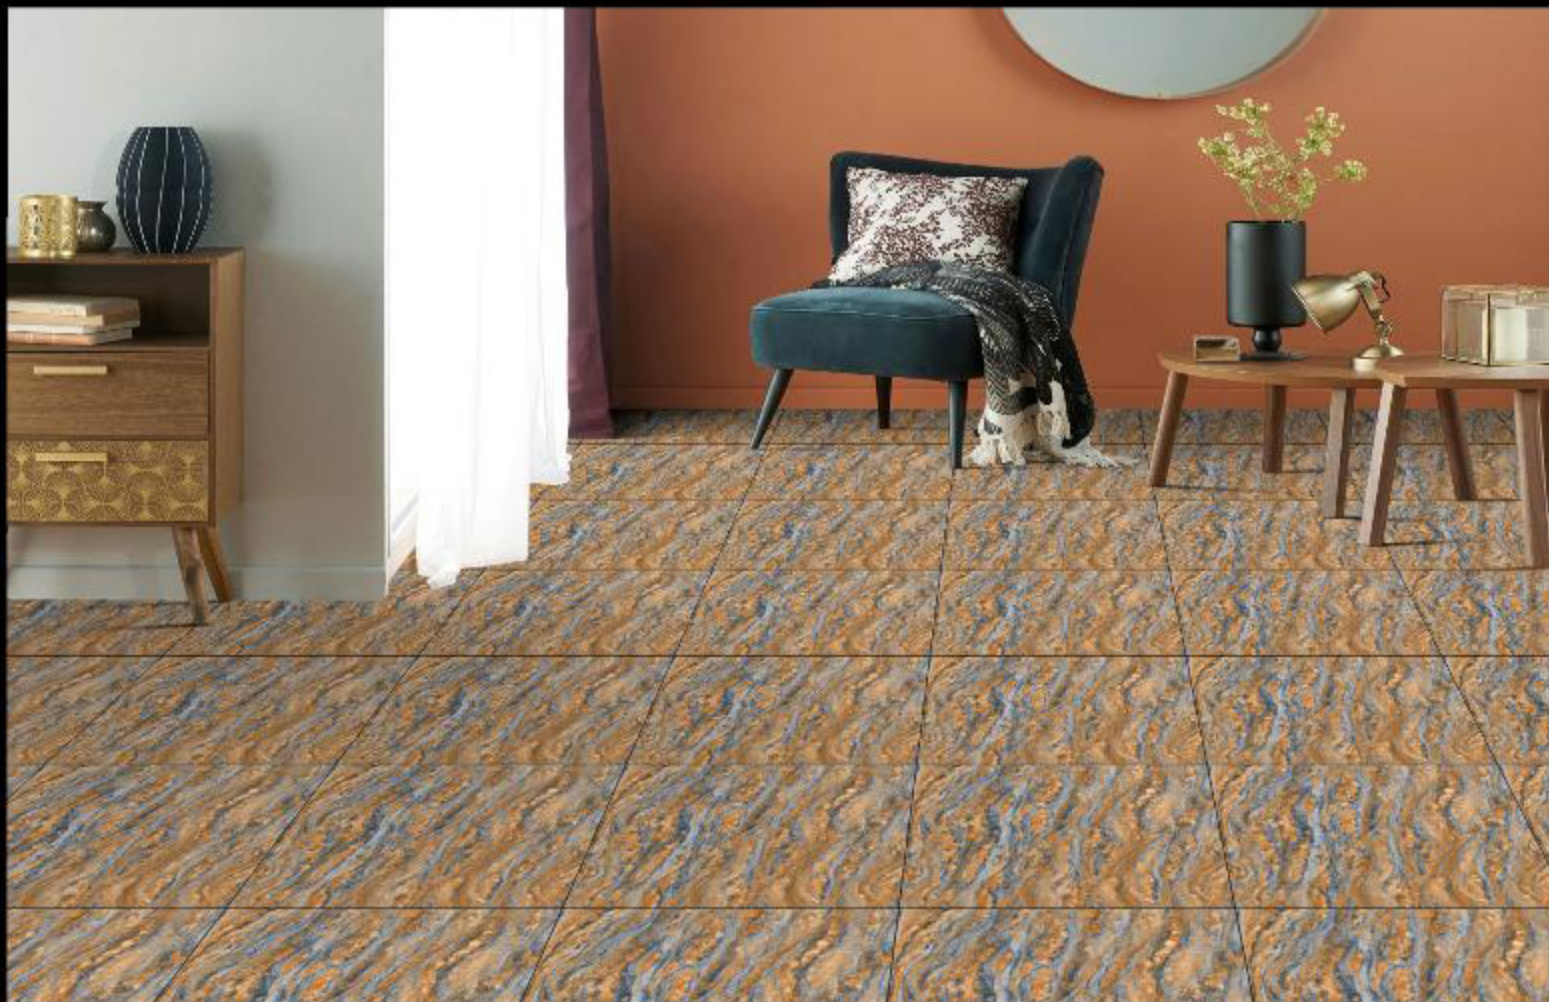

600 X 600 mm
Porcelain tiles



3030



600 X 600 mm
Porcelain tiles



3031



600 X 600 mm
Porcelain tiles



3032



600 X 600 mm
Porcelain tiles



3033

600 X 600 mm
Porcelain tiles





3034

600 X 600 mm
Porcelain tiles





3035



600 X 600 mm
Porcelain tiles


VCERA
TILES LLP



3036



600 X 600 mm
Porcelain tiles



3037



600 X 600 mm
Porcelain tiles

Particulars	Standard as per ISO 13005/EN 176	OUR VALUE	METHOD OF TESTING
Deviation in length	± 0.50%	± 0.3%	EN 98
Deviation in Thickness	± 5%	±3%	EN 98
Sireightness Of Sides	+ 0.5%	+ 0.3%	EN 98
Rectangularity	± 0.6%	± 0.3%	EN 98
Surface Flatness	± 0.5%	± 0.3%	EN 98
Water Absorption	< 3	3 < 4	ISO 10545.3 EN 98
Mohs Hardness	> 5	> 5	EN 101
Flexural Strength	> 35 N/Sq.mm	> 39 N/Sq.mm	—
Abrasion Resistance	As specified by Manufacturer	PE 3	ISO 10545.6 EN 102
Frost Resistance	Frost Proof	Frost Proof	ISO 10534 - 11
Chemical Resistance	No Damage	No Damage	ISO 10534 - 18
Thermal Shock Resistance	No Damage	No Damage	ISO 10545 - 9
Colour Resistance	No Damage	No Damage	—
Stain Resistance	Resistance	Stain Proof	ISO 10545 - 14
Moisture Expansion	Nil	Nil	ISO 10545 - 10
Crazing Resistance	Min 2 Cycle	Min 4 Cycle	—

Note: Color shades may vary as per the variation of the printing process. All above technical specifications are provided for the reference purpose of the tile before ordering. Data is for the reference purpose only. The actual color shade may vary as per the actual production process. The actual color shade may vary as per the actual production process. The actual color shade may vary as per the actual production process. The actual color shade may vary as per the actual production process.

PACKING DETAIL

Size	Thickness	No. OF Tiles	Area Approx.	Weight Approx.
600x600 mm	9 mm	4 Pcs.	1.44 Sq. Mtr.	28kg.

UTILITY OF FLOOR TILES

